



90 DEGREE ATTACHMENTS



	A	B	C	D	90 DEGREE DRILL	
INCH	4.062	1.049	.625	.718	MAXIMUM RECOMMENDED	.250
MM	103	23.8	15.9	18.2	DRILL DIAMETER	6.35 mm

10509 90 DEGREE DRILL ATTACHMENT

INTERNAL THREAD	
ADD TO TOOL No.	
1/4-28	A
10-32	C
9/32-40	E

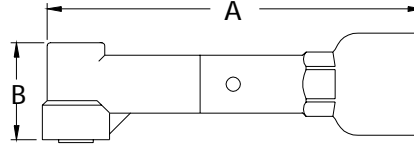



1-20 THREAD
9 TOOTH SPLINE
DRIVE

	A	B	C	D	90 DEGREE DRILL	
INCH	4.062	1.049	.625	.718	MAXIMUM RECOMMENDED	.250
MM	103	23.8	15.9	18.2	DRILL DIAMETER	6.35 mm

14177 THE SUPER 90 DRILL ATTACHMENT

INTERNAL THREAD	
ADD TO TOOL No.	
1/4-28	A
10-32	C
9/32-40	E

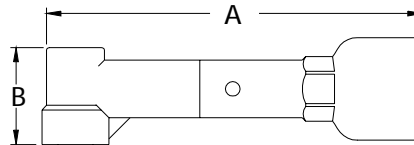



1-20 THREAD
9 TOOTH SPLINE
DRIVE

HIGH NICKEL ALLOY GEARS AND SPECIAL BALL BEARINGS
MAKE THIS ATTACHMENT SUPERIOR

	A	B	C	90 DEGREE DRILL	
INCH	4.062	.937	.625	MAXIMUM RECOMMENDED	.250
MM	103	23.8	15.9	DRILL DIAMETER	6.35 mm

2225 TIGHT ACCESS DRILL ATTACHMENT

INTERNAL THREAD	
ADD TO TOOL No.	
1/4-28	A
10-32	C
9/32-40	E

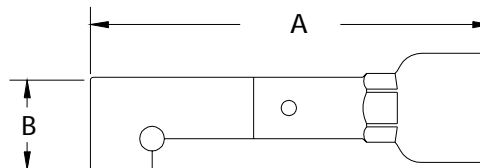



1-20 THREAD
9 TOOTH SPLINE
DRIVE

	A	B	C	D	90 DEGREE DRILL	
INCH	4.062	1.049	.625	.718	MAXIMUM RECOMMENDED	.250
MM	103	23.8	15.9	18.2	DRILL DIAMETER	6.35 mm

10455 ATTACHMENT FOR ROCKWELL 42AR MOTOR

INTERNAL THREAD	
ADD TO TOOL No.	
1/4-28	A
10-32	C
9/32-40	E

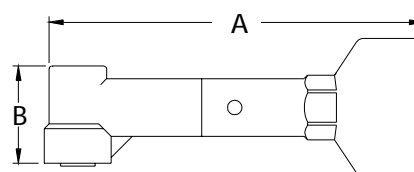

13/8 THREAD
9 TOOTH SPLINE
DRIVE