



	A	B	C	D	E	F	G	SERIES 1 L DRILL	
INCH	.327	1.109	.900	.250	2.250	3.106	6.188	MAXIMUM RECOMMENDED DRILL DIAMETER	.1875 INCH
MM	8.30	28.16	22.86	6.35	57.15	78.89	157.1		4.76 mm




13811 ATTACHMENT ONLY EXTENDED

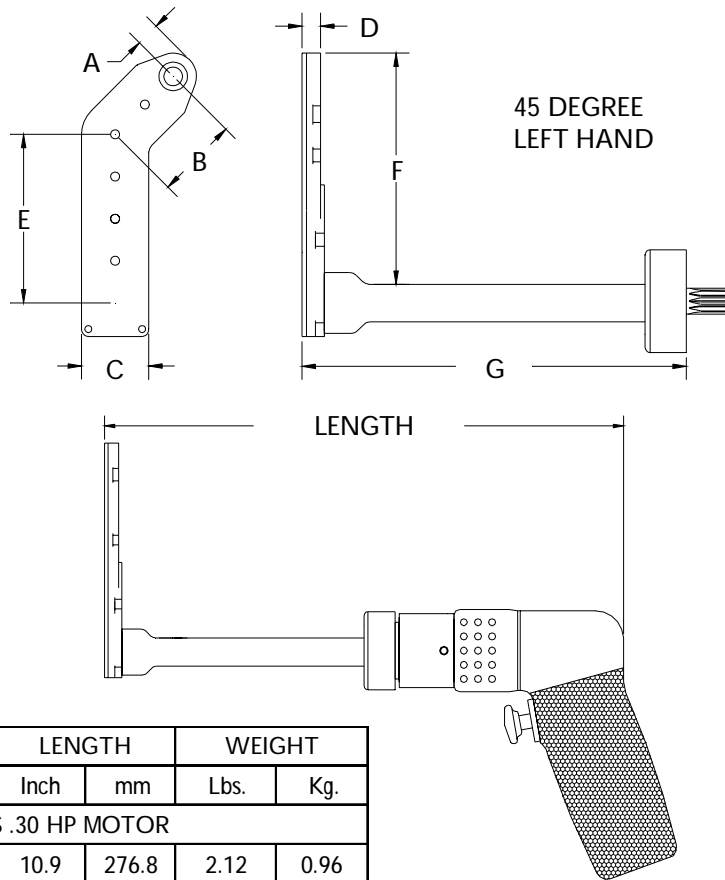

TOOL ORDER NUMBER	R.P.M.	LENGTH		WEIGHT	
		Inch	mm	Lbs.	Kg.
D SERIES .30 HP MOTOR					
16326	250	10.9	276.8	2.12	0.96
13962	500	10.9	276.8	2.12	0.96
13963	750	10.9	276.8	2.12	0.96
13964	1000	10.9	276.8	2.12	0.96
13965	1500	10.9	276.8	2.12	0.96
13966	2800	10.0	254.0	1.84	0.83
D2 SERIES .60 HP MOTOR					
16327	250	12.85	326.3	3.69	1.67
13967	450	12.25	311.1	2.99	1.35
13968	1000	12.25	311.1	2.99	1.35
13969	2000	11.00	279.4	2.74	1.24
13970	2700	11.00	279.4	2.74	1.24
13971	3500	11.00	279.4	2.74	1.24
RD2 .40 HP REVERSIBLE MOTOR					
16328	250	12.85	326.3	3.69	1.67
13972	450	12.25	311.1	3.24	1.46
13973	1000	12.25	311.1	3.24	1.46
13974	2000	11.00	279.4	2.99	1.35
13975	2700	11.00	279.4	2.99	1.35
13976	3500	11.00	279.4	2.99	1.35

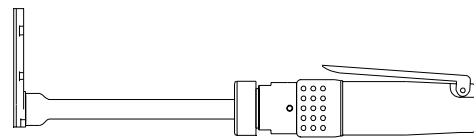

Add an S after the tool order number for the straight handle option.



INTERNAL THREAD	
ADD TO TOOL No.	
1/4-28	A
10-32	C
9/32-40	E
5/16-24	F
COLLET	D