




	A	B	C	D	E	F	G	SERIES 2 L DRILL	
INCH	.327	1.109	.900	.350	2.250	3.106	1.858	MAXIMUM RECOMMENDED DRILL DIAMETER	.250 INCH
MM	8.30	28.16	22.86	8.89	57.15	78.89	47.19		6.35 mm

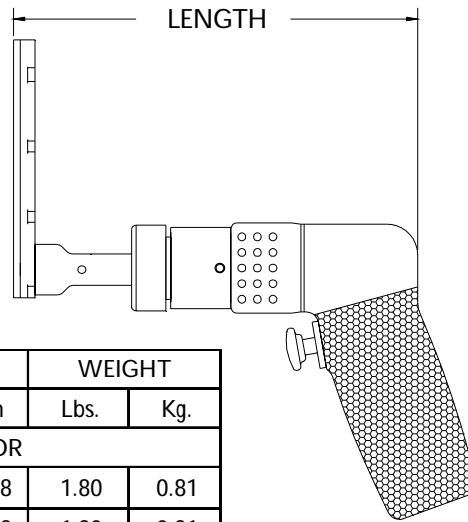


13822 ATTACHMENT ONLY SHORT

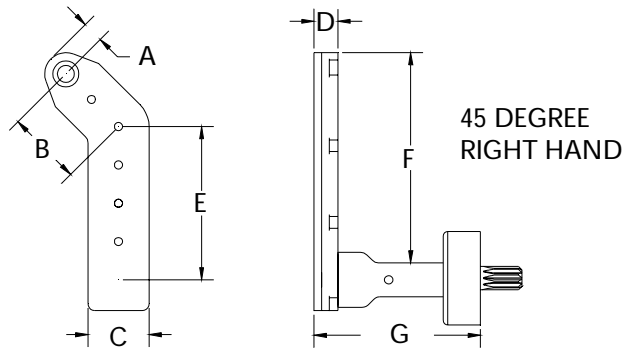

TOOL ORDER NUMBER	R.P.M.	LENGTH		WEIGHT	
		Inch	mm	Lbs.	Kg.
D SERIES .30 HP MOTOR					
16359	250	7.00	177.8	1.80	0.81
14135	500	7.00	177.8	1.80	0.81
14136	750	7.00	177.8	1.80	0.81
14137	1000	7.00	177.8	1.80	0.81
14138	1500	7.00	177.8	1.80	0.81
14139	2800	6.10	154.9	1.52	0.68
D2 SERIES .60 HP MOTOR					
16360	250	8.95	227.3	3.37	1.53
14140	450	8.35	212.0	2.67	1.21
14141	1000	8.35	212.0	2.67	1.21
14142	2000	7.10	180.3	2.42	1.09
14143	2700	7.10	180.3	2.42	1.09
14144	3500	7.10	180.3	2.42	1.09
RD2 .40 HP REVERSIBLE MOTOR					
16361	250	8.95	227.3	3.37	1.53
14523	450	8.35	212.0	2.92	1.32
14524	1000	8.35	212.0	2.92	1.32
14525	2000	7.10	180.3	2.67	1.21
14526	2700	7.10	180.3	2.67	1.21
14527	3500	7.10	180.3	2.67	1.21

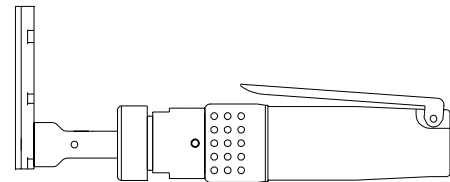

Add an S after the tool order number for the straight handle option.



INTERNAL THREAD	
ADD TO TOOL No.	
1/4-28	A
10-32	C
9/32-40	E
5/16-24	F
COLLET	D