




	A	B	C	D	E	F	G	SERIES 3 L DRILL	
INCH	.327	3.359	.900	.425	4.127	3.427	1.933	MAXIMUM RECOMMENDED DRILL DIAMETER	.312 INCH
MM	8.30	85.31	22.86	10.79	104.8	87.04	49.09		7.92 mm

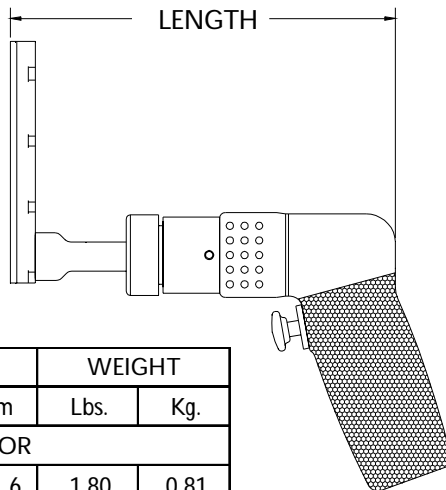


13833 ATTACHMENT ONLY SHORT

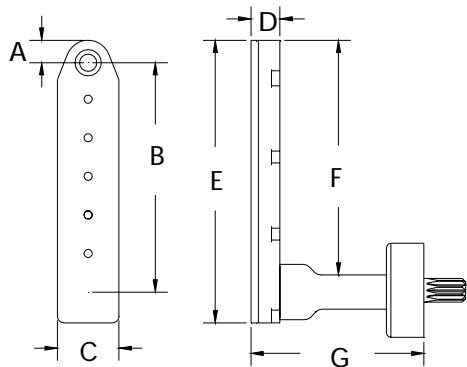

TOOL ORDER NUMBER	R.P.M.	LENGTH		WEIGHT	
		Inch	mm	Lbs.	Kg.
D SERIES .30 HP MOTOR					
16389	250	7.15	181.6	1.80	0.81
14663	500	7.15	181.6	1.80	0.81
14664	750	7.15	181.6	1.80	0.81
14665	1000	7.15	181.6	1.80	0.81
14666	1500	7.15	181.6	1.80	0.81
14667	2800	6.25	158.7	1.52	0.68
D2 SERIES .60 HP MOTOR					
16390	250	8.85	224.7	3.37	1.53
14668	450	8.25	209.5	2.67	1.21
14669	1000	8.25	209.5	2.67	1.21
14670	2000	7.00	177.8	2.42	1.09
14671	2700	7.00	177.8	2.42	1.09
14672	3500	7.00	177.8	2.42	1.09
RD2 .40 HP REVERSIBLE MOTOR					
16391	250	8.85	224.7	3.37	1.53
14673	450	8.25	209.5	2.92	1.32
14674	1000	8.25	209.5	2.92	1.32
14675	2000	7.00	177.8	2.67	1.21
14676	2700	7.00	177.8	2.67	1.21
14677	3500	7.00	177.8	2.67	1.21

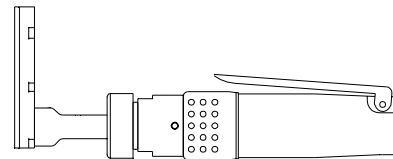

Add an S after the tool order number for the straight handle option.



INTERNAL THREAD	
ADD TO TOOL No.	
1/4-28	A
10-32	C
9/32-40	E
5/16-24	F
COLLET	D

PHONE: 1 775 883 1072 FAX: 1 775 883 4857