




	A	B	C	D	E	F	G	SERIES 3 L DRILL	
INCH	.327	4.484	.900	.425	5.252	4.552	6.263	MAXIMUM RECOMMENDED DRILL DIAMETER	.312 INCH
MM	8.30	113.8	22.86	10.79	133.4	115.6	159.0		7.92 mm

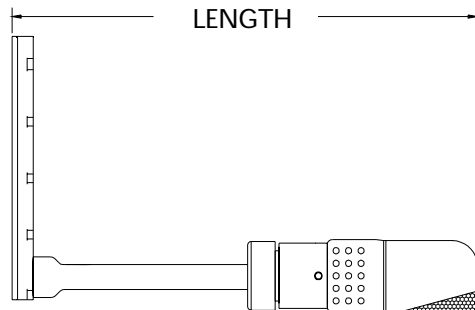


13838 ATTACHMENT ONLY EXTENDED

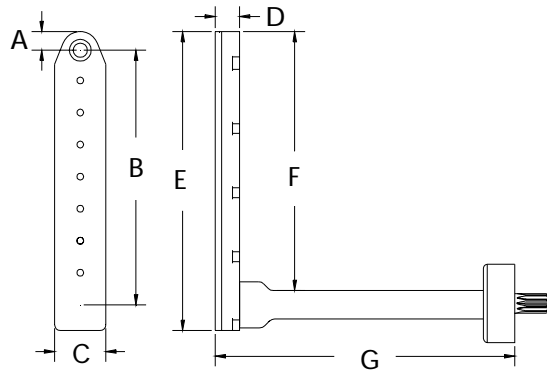

TOOL ORDER NUMBER	R.P.M.	LENGTH		WEIGHT	
		Inch	mm	Lbs.	Kg.
D SERIES .30 HP MOTOR					
16404	250	11.15	283.2	2.12	0.96
14738	500	11.15	283.2	2.12	0.96
14739	750	11.15	283.2	2.12	0.96
14740	1000	11.15	283.2	2.12	0.96
14741	1500	11.15	283.2	2.12	0.96
14742	2800	10.25	260.3	1.84	0.83
D2 SERIES .60 HP MOTOR					
16405	250	13.10	332.7	3.69	1.67
14743	450	12.50	317.5	2.99	1.35
14744	1000	12.50	317.5	2.99	1.35
14745	2000	11.25	285.7	2.74	1.24
14746	2700	11.25	285.7	2.74	1.24
14747	3500	11.25	285.7	2.74	1.24
RD2 .40 HP REVERSIBLE MOTOR					
16406	250	13.10	332.7	3.69	1.67
14748	450	12.50	317.5	3.24	1.46
14749	1000	12.50	317.5	3.24	1.46
14750	2000	11.25	285.7	2.99	1.35
14751	2700	11.25	285.7	2.99	1.35
14752	3500	11.25	285.7	2.99	1.35

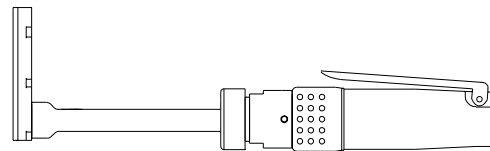

Add an S after the tool order number for the straight handle option.



INTERNAL THREAD	
ADD TO TOOL No.	
1/4-28	A
10-32	C
9/32-40	E
5/16-24	F
COLLET	D