


HIGH OUTPUT

	A	B	C	D	E	F	G	H	SERIES 1 L INSTALLATION	
INCH	.317	2.375	.750	.250	3.077	2.380	6.100	1.800	MAXIMUM RECOMMENDED FASTENER TORQUE	60 INCH LBS.
MM	8.05	60.32	19.05	6.35	78.15	60.45	154.9	45.72		6.77 Nm

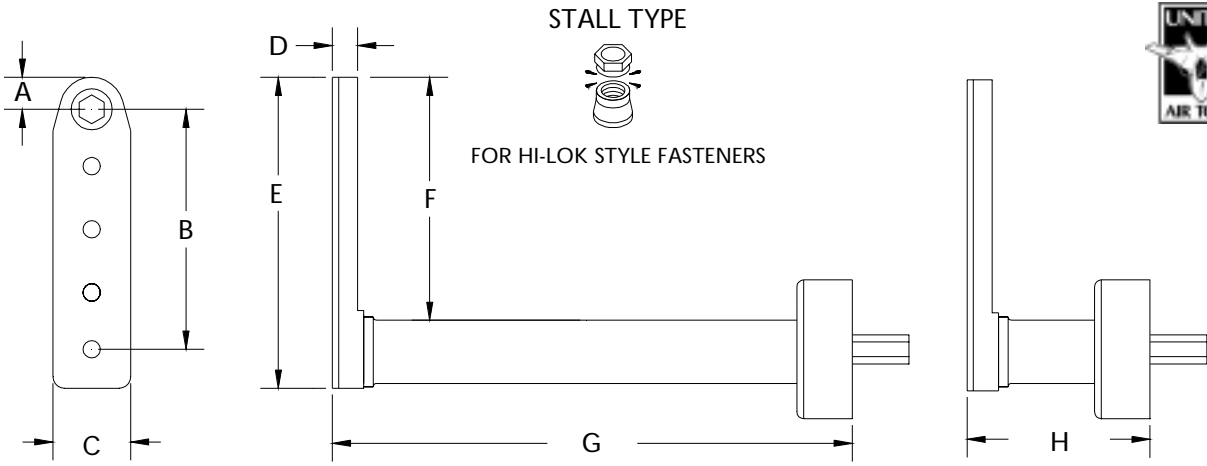


14479 ATTACHMENT ONLY EXTENDED

14480 ATTACHMENT ONLY SHORT

STALL TYPE L TOOLS			OUTPUT AT FASTENER		TOOL ORDER NUMBERS	
MOTOR	RPM	REVERSIBLE	TORQUE INCH LB.	TORQUE Nm	WITH EXTENDED	WITH SHORT
.30 HP	250	NO	60*	6.7*	13276	13277
.30 HP	500	NO	60*	6.7*	15430	15431
.33 HP	260	YES	60*	6.7*	13278	13279
.40 HP	250	YES	60*	6.7*	13280	13281
.40 HP	450	YES	60*	6.7*	13282	13283
.45 HP	400	YES	60*	6.7*	13284	13285
.60 HP	250	NO	60*	6.7*	13286	13287
.60 HP	450	NO	60*	6.7*	13288	13289


TOOL ORDER NUMBER PLUS
NOSE GEAR NUMBER = COMPLETE TOOL

*Maximum torque range of the motor exceeds
the maximum torque range of the attachment

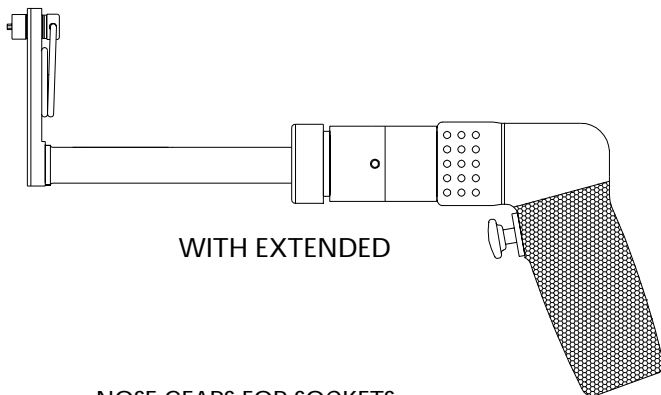

NOSE GEARS FOR SOCKETS.
HEX DRIVER FOR UAT SERIES 1
HO SOCKETS

PART NO.	SIZE	TYPE
12465	9/32	HEX DRIVER
13186	1/4	SQ DRIVE MALE

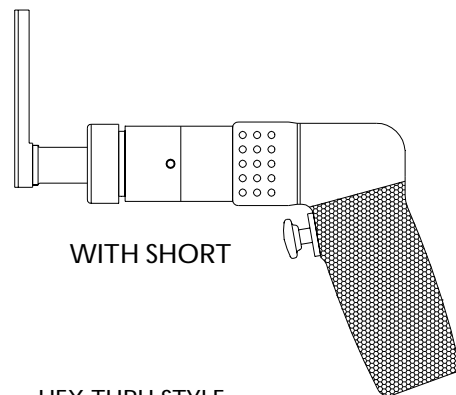

HEX THRU STYLE.
HEX RUNS THROUGH NOSE GEAR.
HEX KEY SPRING IS NOT SUPPLIED.

PART NO.	HEX SIZE	TYPE
12657	7/32	HEX THRU
13187	1/4	HEX THRU
13188	9/32	HEX THRU