


HIGH OUTPUT


	A	B	C	D	E	F	G	H	SERIES 1 L INSTALLATION	
INCH	.317	1.187	.750	.250	2.437	3.282	6.300	2.000	MAXIMUM RECOMMENDED FASTENER TORQUE	60 INCH LBS.
MM	8.05	30.14	19.05	6.35	61.89	83.36	160.0	50.80		6.77 Nm

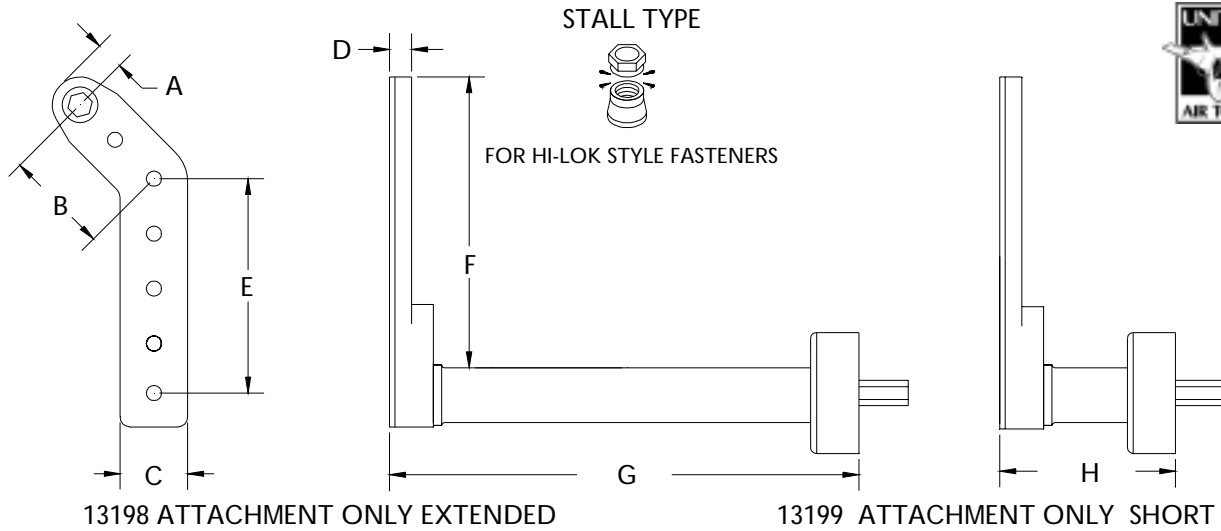

STALL TYPE L TOOLS			OUTPUT AT FASTENER		TOOL ORDER NUMBERS	
MOTOR	RPM	REVERSIBLE	TORQUE INCH LB.	TORQUE Nm	WITH EXTENDED	WITH SHORT
.30 HP	250	NO	60*	6.7*	13342	13343
.30 HP	500	NO	52	5.8	15434	15435
.33 HP	260	YES	60*	6.7*	13344	13345
.40 HP	250	YES	60*	6.7*	13346	13347
.40 HP	450	YES	60*	6.7*	13348	13349
.45 HP	400	YES	60*	6.7*	13350	13351
.60 HP	250	NO	60*	6.7*	13352	13353
.60 HP	450	NO	60*	6.7*	13354	13355


TOOL ORDER NUMBER PLUS
NOSE GEAR NUMBER = COMPLETE TOOL

*Maximum torque range of the motor exceeds
the maximum torque range of the attachment

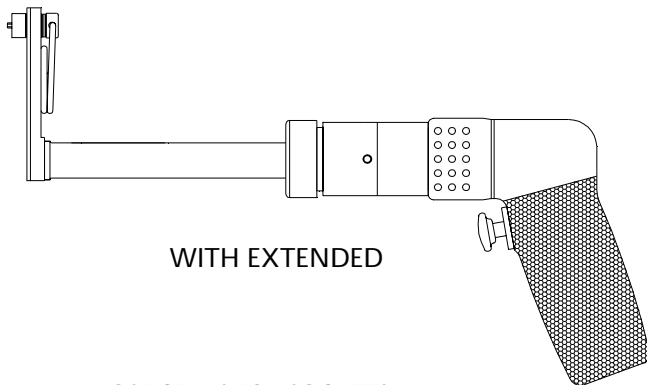

NOSE GEARS FOR SOCKETS.
HEX DRIVER FOR UAT SERIES 1
HO SOCKETS

PART NO.	SIZE	TYPE
12465	9/32	HEX DRIVER
13186	1/4	SQ DRIVE MALE

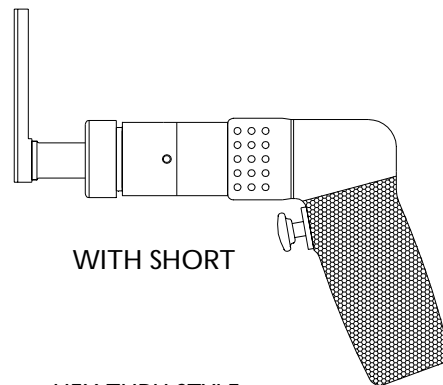

HEX THRU STYLE.
HEX RUNS THROUGH NOSE GEAR.
HEX KEY SPRING IS NOT SUPPLIED.

PART NO.	HEX SIZE	TYPE
12657	7/32	HEX THRU
13187	1/4	HEX THRU
13188	9/32	HEX THRU